National Institute for Aviation Research

Wichita State University

1845 N. Fairmount

Wichita, Kansas 67260-0093

22-2152-RR52873

Kansas Aviation Research and Technology (KART)

Minimum Thickness of Aluminum Skins in Lightning Direct Attachment Zones

List of Abbreviations, Acronyms, and Symbols

A, Amp	Amperes
ARP	Aerospace Recommended Practice
C	Coulomb
DEL	Direct Effects of Lightning
ETL	Environmental Test Laboratory
EUT	Equipment Under Test
KART	Kansas Aviation Research and Technology
kA	Kilo amperes
kA^2s	Kilo amperes squared seconds (measure of action integral)
µJ	micro joules
µs	Microseconds
mm	Millimeters
mm^2	Millimeters squared
m **O**	Milliohms
ms	Milliseconds
NIAR	National Institute for Aviation Research
Ω	Ohms
RH	Relative humidity
TP	Test point

TABLE OF CONTENTS

SECTION	TITLE	PAGE
1.0	References and Applicable Documents	8
1.1	Specifications and Standards	8
2.0	Scope	8
2.1	Purpose	9
3.0	General Requirements	9
3.1	General Test Setup	9
3.1.1	Test Article Design	10
3.1.1	High Current Generator	10
3.1.1	Flammable Gas Ignition Detection	15
3.1.2	Test Witnessing	16
3.2	Arc Entry Test Procedure with Ignition Source Detection	17
4.0	Results and Testing	18
4.1	Ignition	18
4.2	Physical Damage	19
4.2.1	Melt-through Hole Size – Actual Panel Measurement vs Calculated	22
5.0	Conclusions	25
6.0	References	27
Appendix A	Waveform Test Data Shot Log	28
Appendix B	Full Data Listing with Melt-Through Hole Data	37
Appendix C	Test Article Drawings	44

LIST OF FIGURES

FIGURE **TITLE** **PAGE**

Figure 1: Waveform Verification Setup 11
Figure 2: Jet-Diverting Electrode 12
Figure 3: General Test Setup 14
Figure 4: General Test Setup 15
Figure 5: General Test Setup 15
Figure 6: Test Setup Diagram 16
Figure 7: Left: Exterior-side damage, and right: through hole 19
Figure 8: Left: Interior-side damage, and right: through hole 20
Figure 9: Front side (left) and backside (right) views of a large shockwave-

2.1 Purpose

This test was designed to determine the minimum thickness of aluminum21.2 tt 0 Tne p(-4 (ic8)Tja)-4

electrically bonded to the generator return by clamping to copper straps between the panel and gen

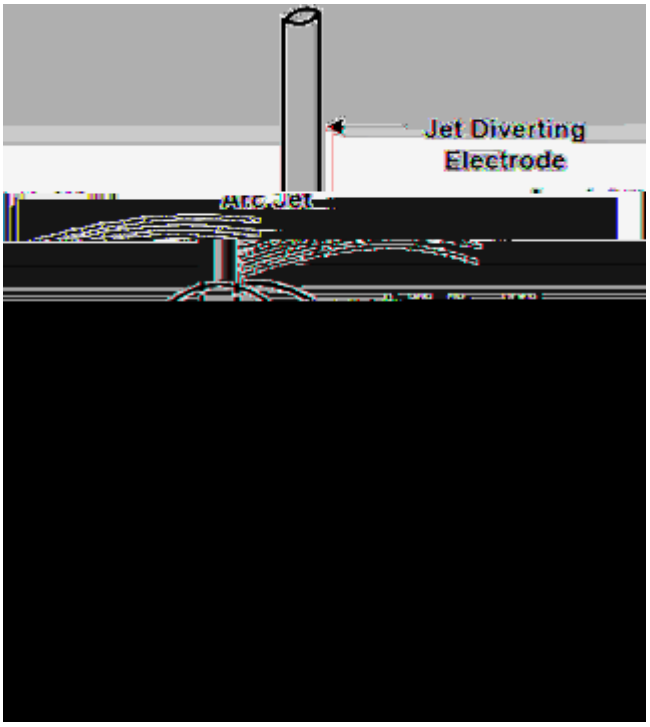

Figure 2: Jet-Diverting Electrode

The current Components listed in Table 3 were applied to the test panels for each lightning Zone:

Zone 1A: Components A, B, C*

Zone 1C: Components A_H, B, C*

Zone 2A: Components B, C*, D

Zone 3: Components A/5, B, C*

Description	Manufacturer	Model Number	Serial Number	Cal Due Date
Analog Voltage Input Module	Yokogawa	701250	91P321170	9/30/2022
Analog Voltage Input Module	Yokogawa	701250	91P321166	9/30/2022
="4 Channel 100MHz 1GSa/s"	Rigol	DS1104	DS1ZA181305414	9/30/2022
Fuel Flow control	NIAR	FFC001	001	N/A
Massflow Controler Economical Gas	Omega	FMA5543	483712-1	10/13/2022
Mass Flow Controller 0-20 SKM H2	Omega	FMA5524A-H2	484161-1	10/13/2022
="200uj Spark Circuit"	NIAR	SS001	001	N/A
#5 EOS Rebel T6i Camera	Canon	DS126571	352072015527	N/A
#5 EOS Rebel 18-55mm Camera Lens	Canon	EFS 18-55mm	610204005413	N/A
Digibridge	Gen Rad Inc.	1689	8243454004	5/31/2022

Single Stage Best
Value Re Q 79.4 84ue f 72 7 8 R 1 1.04 -0 0 1.04 -0 10.n [(Si)0.6 w 11.04 -06 128 0.48 re f 193.8 4

The test setup consisted of a fuel flow setup and a voltage spark-source setup. The fuel flow setup included the hydrogen and air mass flow controllers, and the associated tubing, hoses, and test chamber containing the flammable gas mixture, with the foil blowout panel. The spark source setup consisted of the spark source circuit, the high voltage power supply, the electrostatic voltmeter, and the oscilloscope for the electrostatic voltmeter. The spark source capacitance was measured with a capacitance bridge.

Figure 6: Test Setup Diagram

4.2 Physical Damage

After lightning testing, the panels were visually evaluated for melt-through damage and measurement of holes. Melt-through holes were categorized into two designations regarding the type of damage visible on the interior (fuel tank side) of the panel.

1. Panels with “damage” show evidence of melting on the interior side of the panel, but the damage area is intact and does not contain a through hole.
2. Panels with “through holes” are damaged areas in which daylight can be seen all the way through the panel.

Examples of damage compared with through hole are shown in Figure 7 and Figure 8.

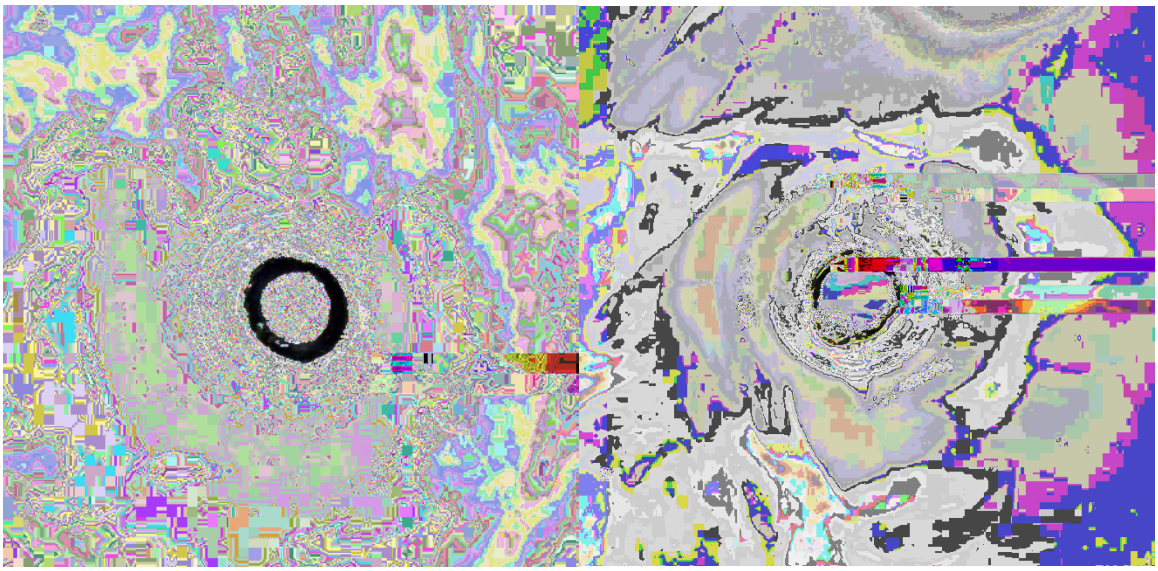

Figure 7: Left: Exterior-side damage, and right: through hole

Figure 9: Front side (left) and backside (right) views of a large shockwave-driven through-hole

Multiple panels were found to have through holes but did not ignite the flammable gas during the lightning test. This seemed to occur for two different reasons. One possible cause was a thin layer of fuel tank primer that stayed in place on the inside surface of the panel despite the aluminum panel experiencing material loss due to melting. This primer layer may have prevented the gas from igniting, however, this primer layer was so thin that it later flaked off during handling of the panel with minimal force post-test. The second possible explanation was a lightning attachment producing a small pinhole in the panel, which was insufficient to heat the test point or introduce the flammable mixture to the lighting plasma channel to the point of ignition.

Metal bond assemblies sustained less damage on the inside (fuel tank side) of the test article

melting was the primary damage mechanism. The only test points which did not follow this trend had very large holes which did not result from melting alone, but also due to shockwave effects.

Panels which contained through holes, and their corresponding hole size data, are listed in Appendix B.

4.2.1 Melt-through Hole Size – Actual Panel Measurement vs Calculated

Intermediate and continuing currents can produce melting of metallic skins. According to *Lightning Protection of Aircraft,* the length of time the continuing current remains attached to the metal skin is the primary factor in the resulting melt-through damage. The likelihood of melt-through is also influenced by paint and primer, which act as a dielectric layer on metal surfaces, increasing the dwell time of lightning. Protection of metallic skins should aim to prevent melt-through in areas that endanger safety of flight. Hole formation due to melt-through presents a threat to the safety of flight if:

the lightning channel comes into contact with flammable materials inside the fuel tank,

a hole causes depressurization, or

the hole degrades mechanical strength of a primary structure.

The equations below are taken from Section 6.2.1 of *Lightning Protection of Aircraft*, which were originally obtained from Hagenguth's work in 1949 (Fisher, Plumer, & Perala, p. 150). These equations determine hole size based on the charge transfer delivered during the lightning continuing currents and can be used to predict melt-through hole size on solid metal skins.

$$\# = 0.933\,P^{?.4=} \text{ for } 0 < P < 0.8 \text{ mm} \quad (1)$$

$$\# = 0.813\,P^{?5.98} \text{ for } 0.8 < P < 4 \text{ mm} \quad (2)$$

Where,

#area of hole melted (square millimeters)

3charge (coulombs) delivered to the point by the arc

=Pthickness of metal sheets (centimeters)

There was no consistent relationship between the expected (calculated) hole size and observed (measured) hole size in any Zone for solid panels. Thinner solid panels had expected hole sizes that were larger than observed hole sizes, however, thicker solid panels had expected hole sizes that were smaller than the observed hole size. This data is in Table 6 and Table 7.

These equations do not apply to metal bond panels, nor do they take into account the impact of the pressure shockwave resulting from high amplitude initial stroke current Components (A and A_H) on very thin panels (solid or bonded) as seen in Figure 9. The hole sizes in these shockwave scenarios were dramatically increased as compared to holes formed purely by the mechanism of melting. Despite this, the equations were still applied to shockwave holes in the data tables in Appendix B to allow comparison to the

Table 8: Average of observed hole size for metal bond panels with 18 C charge transfer

Panel Thickness (in)	Zone 3		Zone 2A		Zone 1C		Zone 1A	
	Charge Transfer (C)	Hole Area (mm^2)	Charge Transfer (C)	Hole Area (mm^2)	Charge Transfer (C)	Hole Area (mm^2)	Charge Transfer (C)	Hole Area (mm^2)
0.008	18.64	0.00	16.83	628.32	17.33	1963.50	N/A	N/A
0.012	18.53	0.00	18.02	0.00	19.38	0.00	19.13	6018.11
0.016	18.30	0.00	17.57	0.00	19.13	0.00	20.87	1590.43
0.025	17.69	0.00	17.87	0.00	20.37	0.00	20.25	0.00
0.032	18.48	0.00	19.17	0.00	20.31	0.00	18.38	0.00

Table 9: Average of observed hole size for metal bond panels wi6 (b3>>BDC Q 13i)6 (z)11.04 306

For all test points, metal bond panels sustained less damage than their equivalent (same overall panel thickness, lightning Zone, charge transfer) solid panel counterparts.

On thin metal bond panels (0.008”, 0.012”, and 0.016”) in Zone 1A the pressure shockwave of the lighting stroke current influences the resulting hole size more than melting due to charge transfer does. This was also true for 0.008” panels in Zone 1C and Zone 2A.

Based on the hole size equation in section 4.2.1 from the LTI Handbook, thinner solid panels had expected (calculated) hole sizes that were larger than observed (measured) hole sizes, however, thicker solid panels had expected hole sizes that were smaller than the observed hole size.

6.0 References

AGATE Lightning Direct Effects Handbook - Rev E. (2021). Wichita: NIAR.

Fisher, F. A., Plumer, J. A., & Perala, R. A. (2004). *Lightning Protection of Aircraft.* Pittsfield: Lightning Technologies Inc.

Appendix A – **Waveform Test Data Shot Log**

EUT	Test Point	Components	Component A/D				Component B			Component C/C*		
			Peak Amplitude (kA)	A/I (AAs)	Rise Time (µs)	Duration (µs)	Average Amplitude (A)	Charge Transfer (C)	Duration (ms)	Average Amplitude (A)	Charge Transfer (C)	Duration (ms)
Aluminum Calibration Plate	WV01	A/5, B, C*	-46.00	9.92E+04	14	248	0.00E+00	0.00	90.662	516.71	18.15	35.17 -
Al Cal Plate	WV02	A/5, B, C*	-40.07	7.29E+04	14	250	0.00E+00	0.00	253.708	538.77	17.91	33.21
Al Cal Plate	WV03	A/5, B, C*	-39.47	6.97E+04	14	216	2.13E+03	10.64	5.002	507.72	18.90	37.23
32-1	TP1-18C	A/5, B, C*	-38.67	6.25E+04	14	194	2.13E+03	10.66	5	515.13	18.65	36.20
40-1	TP1-18C	A/5, B, C*	-38.73	6.25E+04	14	194	2.13E+03	10.66	5	514.80	18.75	36.43
50-1	TP1-18C	A/5, B, C*	-38.73	6.33E+04	14	192	2.13E+03	10.66	5	522.94	18.17	34.75
63-1	TP1-18C	A/5, B, C*	-38.87	6.38E+04	14	192	2.10E+03	10.52	5.002	525.10	18.26	34.78
Al Cal Plate	WV01	A, B, C*	-195.80									

EUT	Test Point	Components	

EUT	Test Point	Components	Component A/D	Component B

EUT	Test Point	Components	Component A/D	Component B

			Component A/D	Component B	Component C/C*
EUT	**Test Point**	**Components**			

			Component A/D			Component B	Component C/C*
EUT	Test Point	Components	Peak Amplitude (kA)	A/I (AAs)	Rise Time (µs)		

Appendix B – **Full Data Listing with Melt-Through Hole Data**

Solid Panel Data								
Panel ID	Lightning Test Zone	Test Point	Target Charge Transfer [C]	Charge Transfer [C]	Ignition	Panel Thickness (inches)	Area Expected (mm^2)	Area of Through Hole Observed (mm^2)
32-1	34.6C	0.851	scn 415.8	595.92	53.76 57.48 re f* re f		359.52	595.9C 0.8q2

Solid Panel Data						
Panel ID	Lightning Test Zone	Test Point	Target Charge Transfer [C]	Charge Transfer [C]		

Solid Panel Data								
Panel ID	Lightning Test Zone	Test Point	Target Charge Transfer [C]	Charge Transfer [C]	Ignition	Panel Thickness (inches)	Area Expected (mm^2)	Area of Through Hole Observed (mm^2)
71-2	1C	1	6	6.35	No	0.071	2.07	0.00
71-2	1C	2	6	-	N/A	0.071	-	

Metal Bond Panel Data							
Panel ID	Lightning Test Zone	Test Point	Target Charge Transfer [C]	Charge Transfer [C]	Ignition	Aluminum Sheet Thickness (half of panel thickness) (inches)	Area of Through Hole Observed (mm^2)

Metal Bond Panel Data							
Panel ID	Lightning Test Zone	Test Point	Target Charge Transfer [C]	Charge Transfer [C]	Ignition	Aluminum Sheet Thickness (half of panel thickness) (inches)	Area of Through Hole Observed (mm^2)
16-1	2A	2	6	-	N/A	0.016	-
16-1	2A	3	6	-	N/A	0.016	-
16-2	1C	2	18	19.13	No	0.016	0
16-2	1C	3	18	-	N/A	0.016	-
16-2	1C	1					

Exterior Side with Regular Primer and Topcoat